



## Log Cabin "DS" series 3.5×3

Project Dimensions

5.3 × 4.8 / 22 m<sup>2</sup>

Full house set

**4,043 €**

### Timber




45 MM



65 MM  
+ 1,040 €


## Project planning



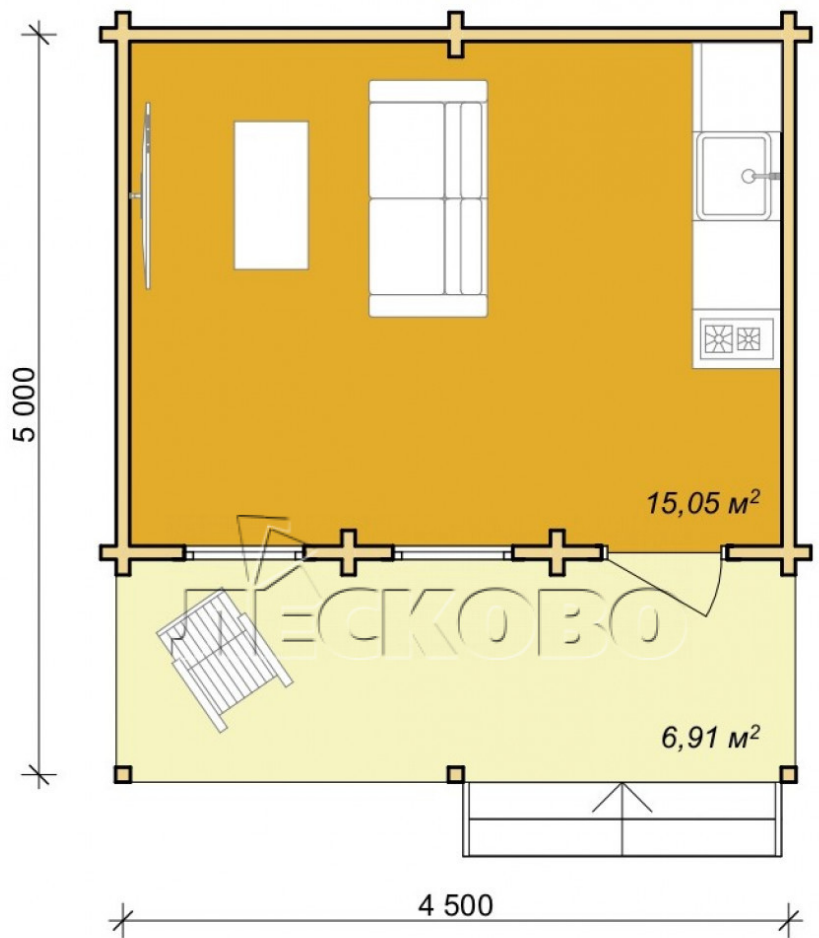






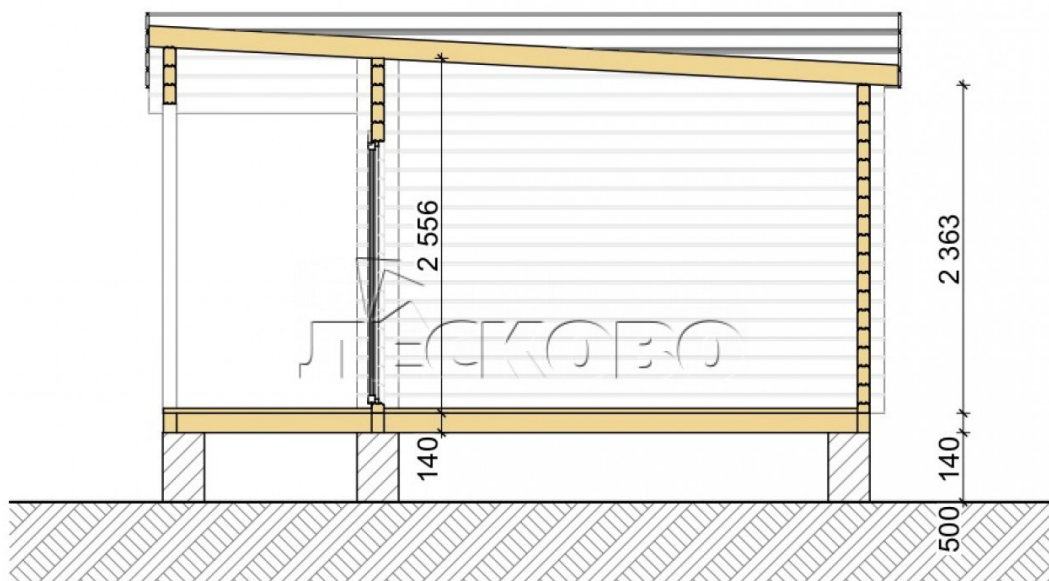

## House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
  - Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
  - Floors: floorboard 35 mm, Chamber drying;
  - Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
  - Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;
- {{ attribute\_windows }}
- Wooden doors;
- {{ attribute\_doors }}
- Platbands: dry planed board 20 × 100 mm;
  - Roof: shingles.

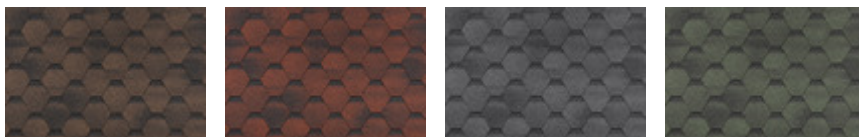

- Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8