



## Log Cabin "DL-33"

Project Dimensions

6 × 6 / 47 m<sup>2</sup>

Full house set

**10,671 €**

### Timber



45 MM





65 MM  
+ 2,949 €



## Project planning



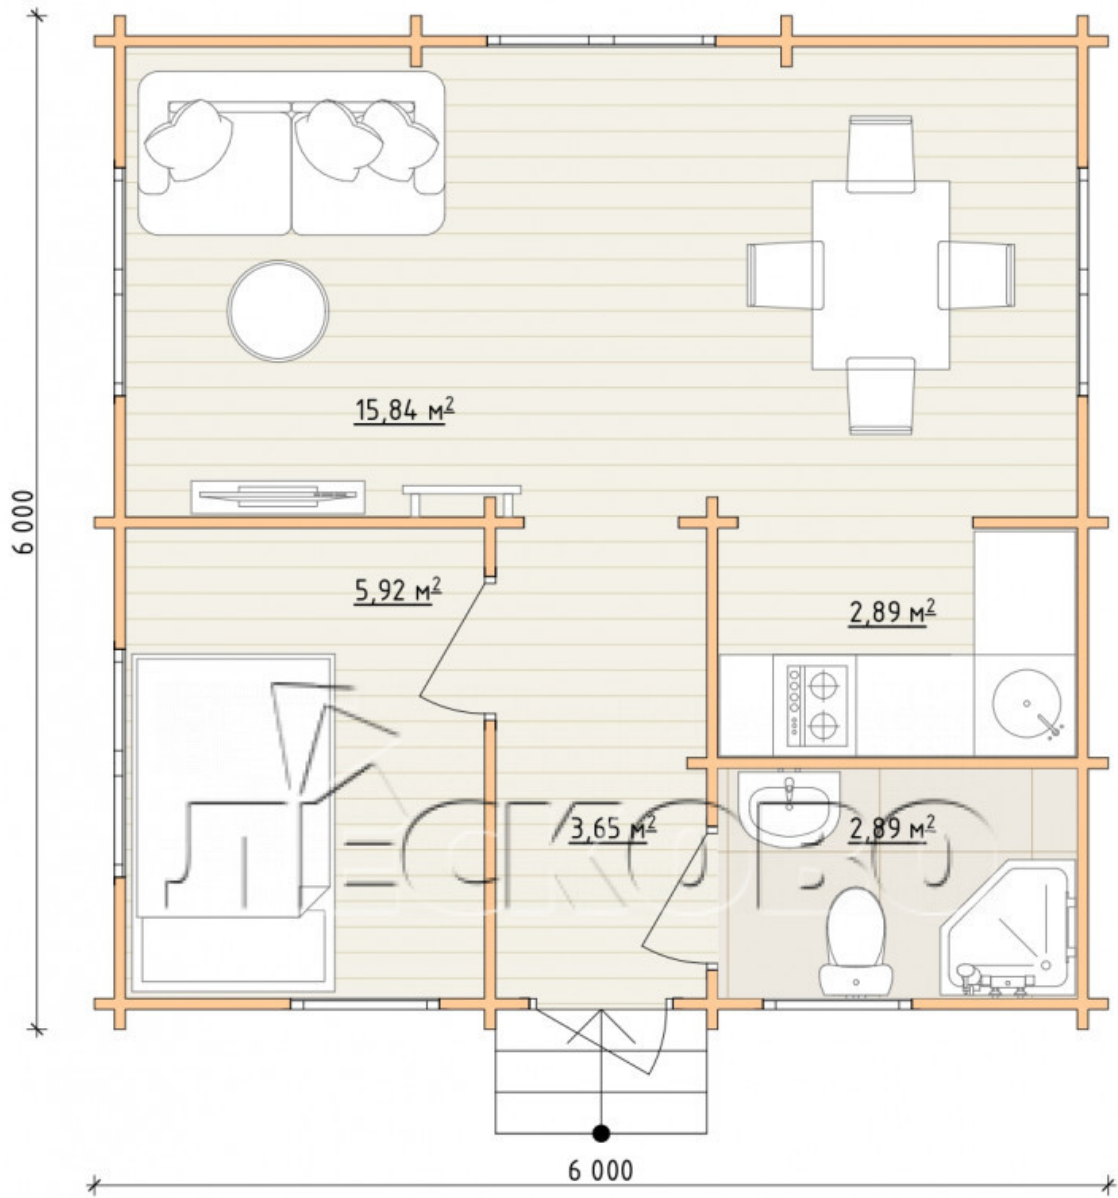


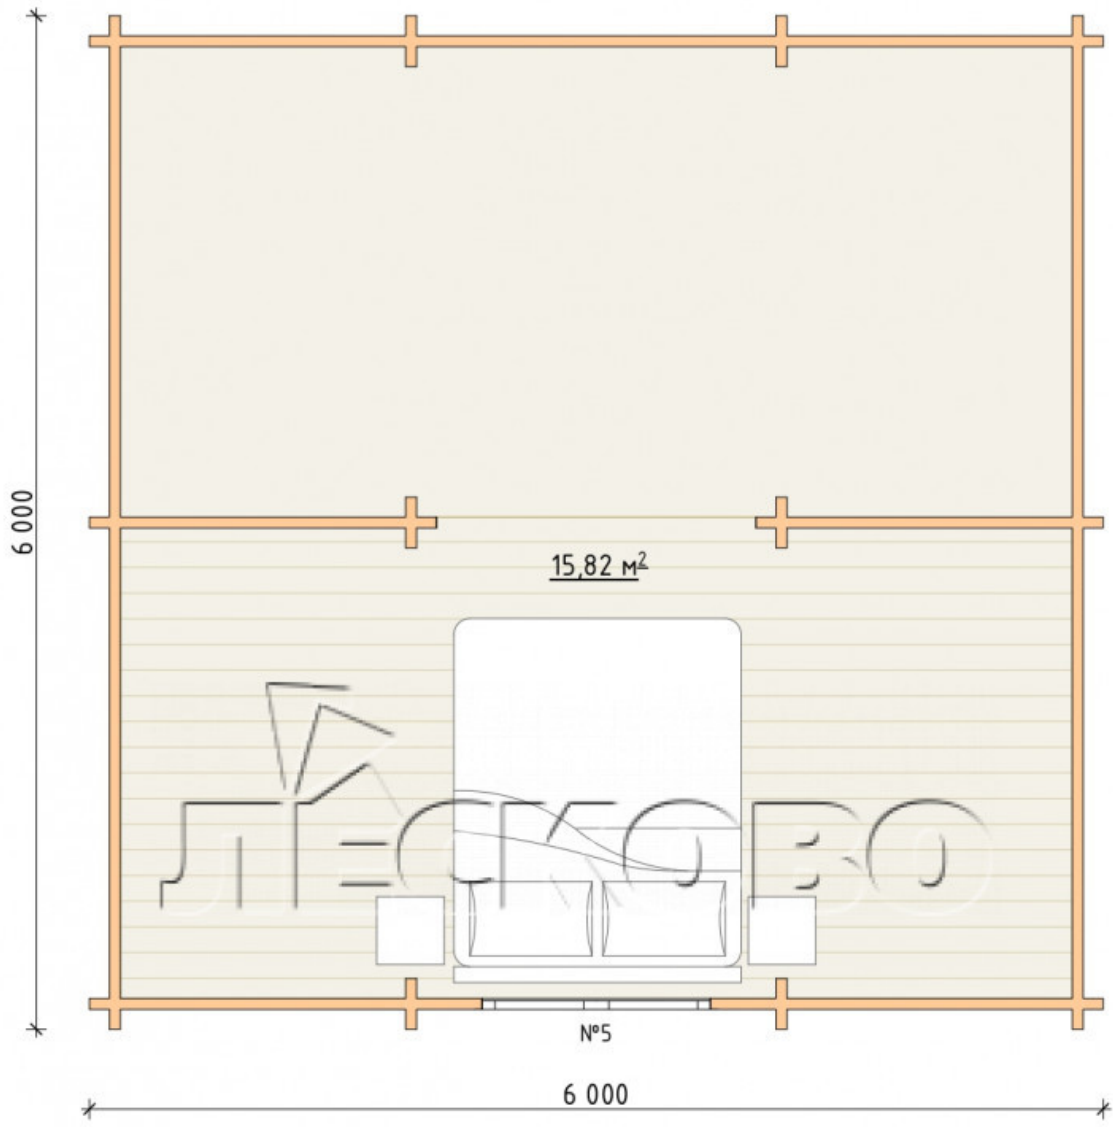







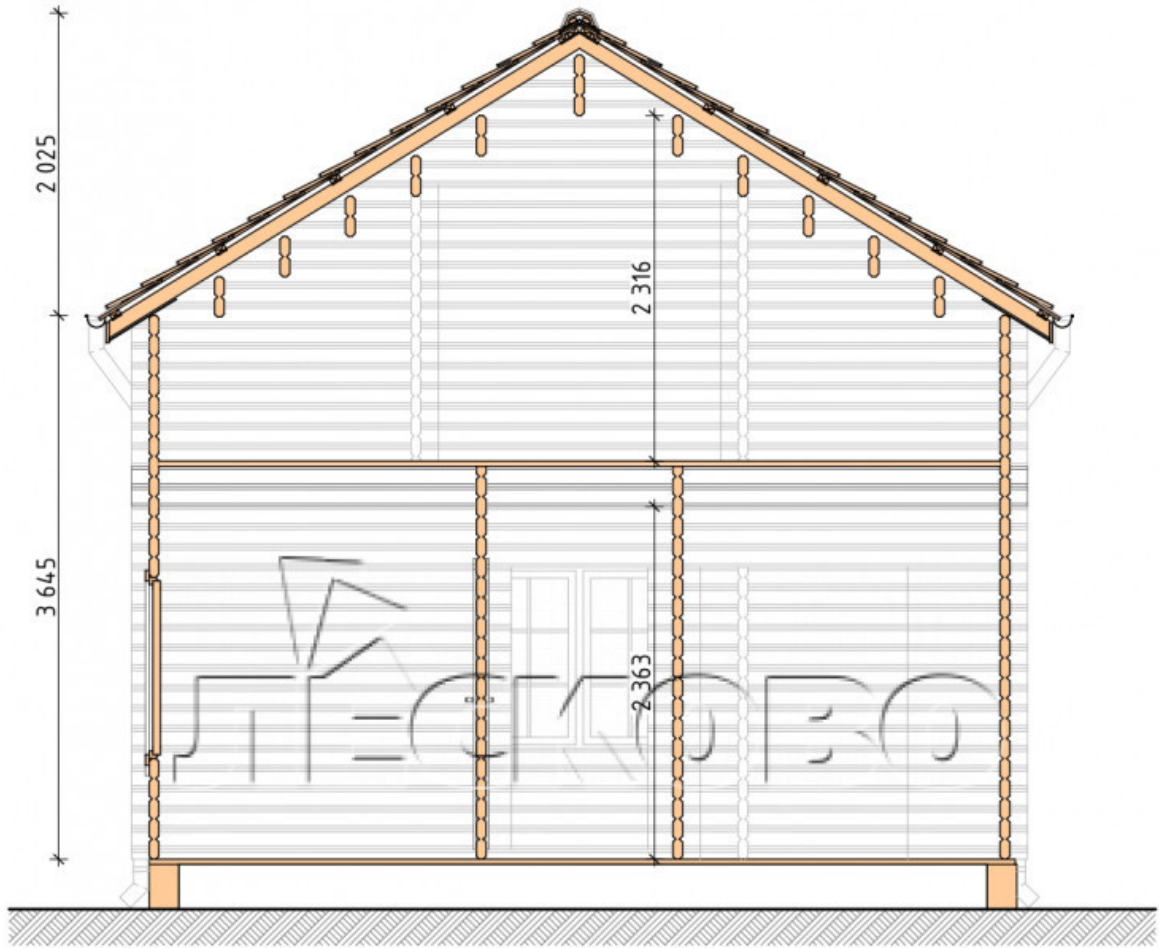

# House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
- Logs, lower harness: board 45 × 145 mm chamber drying 12-16%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



Window 1.34×1.17  
м.5 шт.



0.87×0.78 м.2 шт.

- Wooden doors;




2 шт.



0.84×1.885 м.  
glass.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

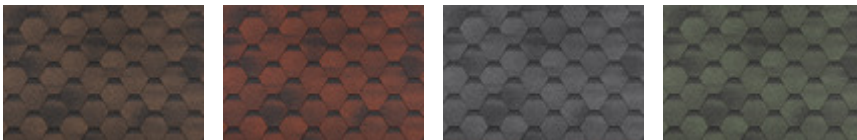

9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8