



## Log Cabin "DG-42"

Project Dimensions

8 × 10 / 73.1 m<sup>2</sup>

Full house set

**14,521 €**

### Timber



45 MM




65 MM  
+ 3,889 €

## Project planning







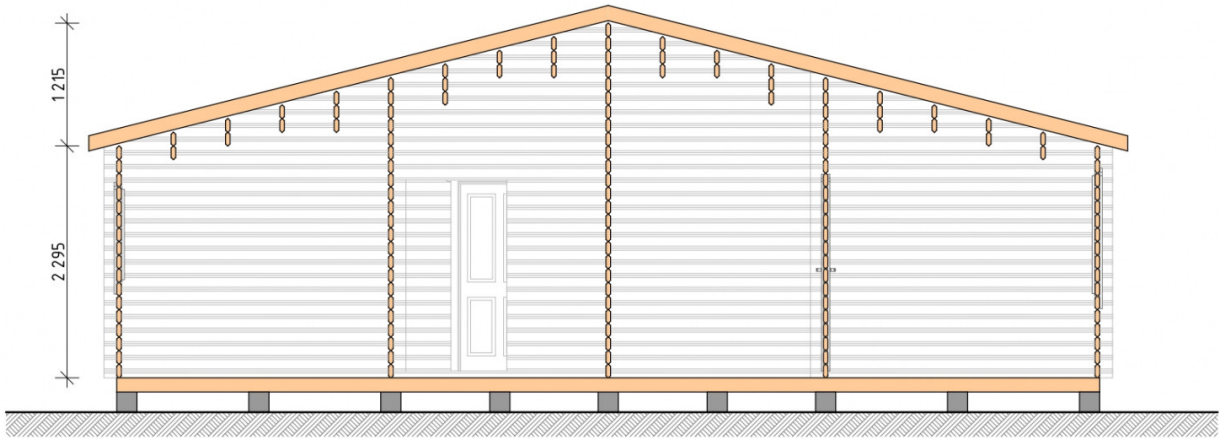

## House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;

- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



Window 0.84×1.885  
м.2 шт.



Window 0.87×1.17  
м.4 шт.



Window 1.34×1.17  
м.2 шт.



Window 1.62×1.885  
м.1 шт.



1.34×0.91 м.1 шт.

- Wooden doors;



4 шт.




Door 0.84×1.885 м.  
Df.1 шт.



1.62×1.885 м.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

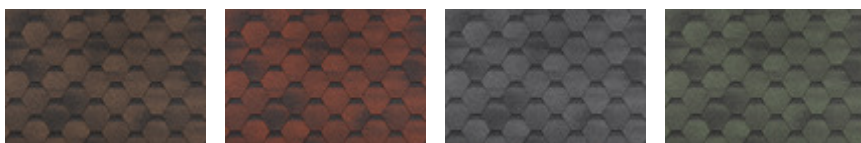

9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8