



## Log Cabin "DG-44"

Project Dimensions

8 × 8.3 / 53.5 m<sup>2</sup>

Full house set

**11,353 €**

### Timber




45 MM



65 MM  
+ 3,197 €


## Project planning



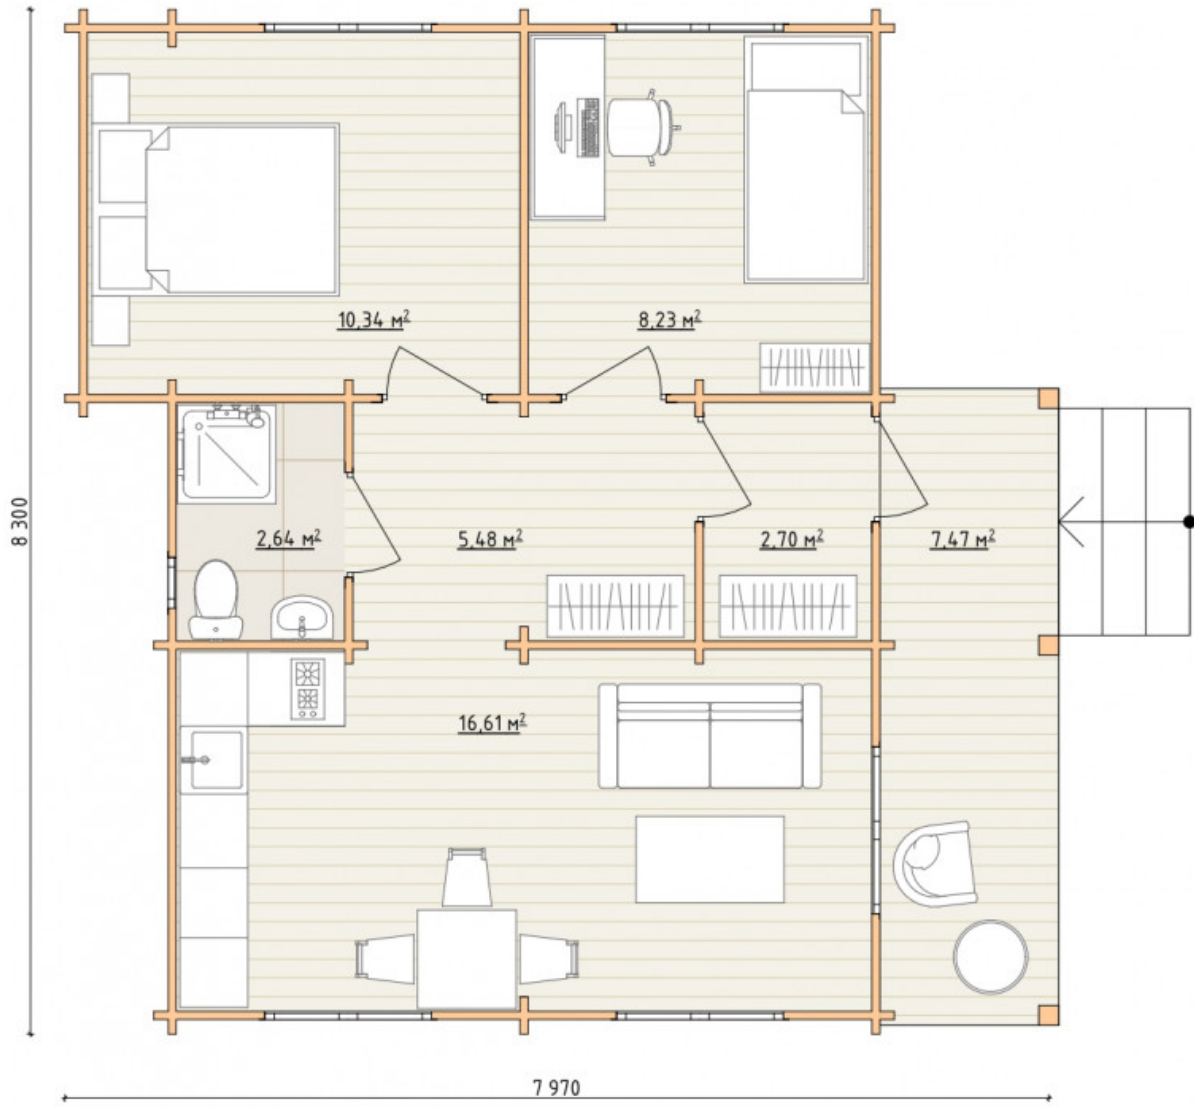





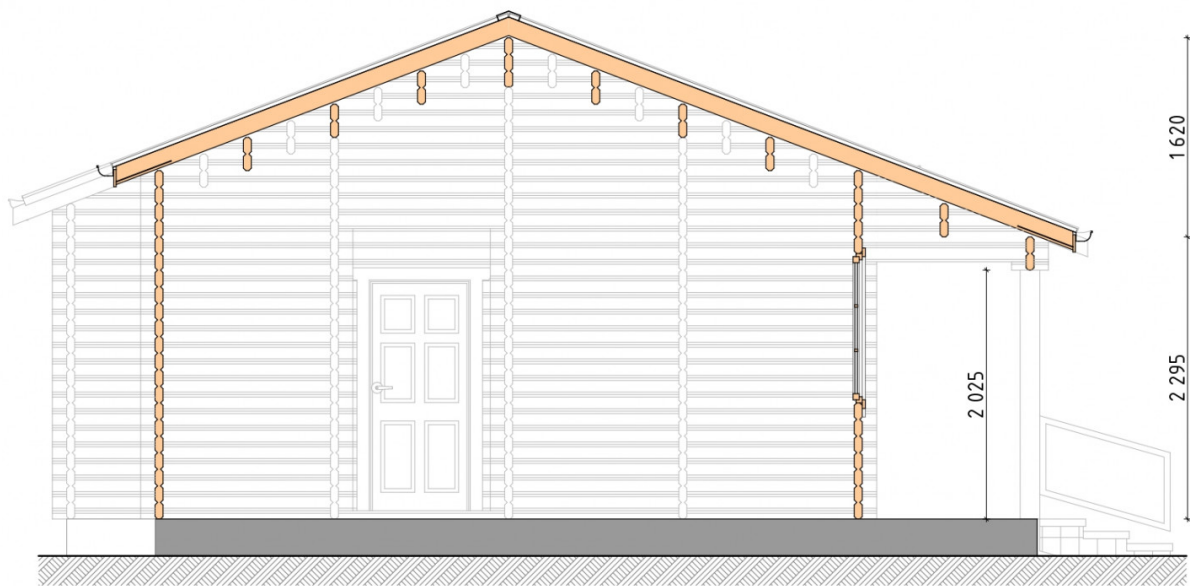

## House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



Window 1.34×1.17 0.40×0.38 м.1 шт.  
м.5 шт.

- Wooden doors;



4 шт.




Door 0.84×1.885 м.

Df.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

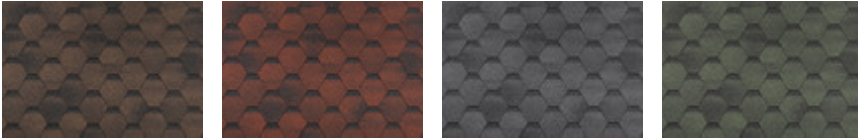

9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8