



Log Cabin "DG-07"

Project Dimensions

5 × 10.7 / 47.3 m²

Full house set

11,761 €

Timber




45 MM




65 MM
+ 1,710 €

Project planning



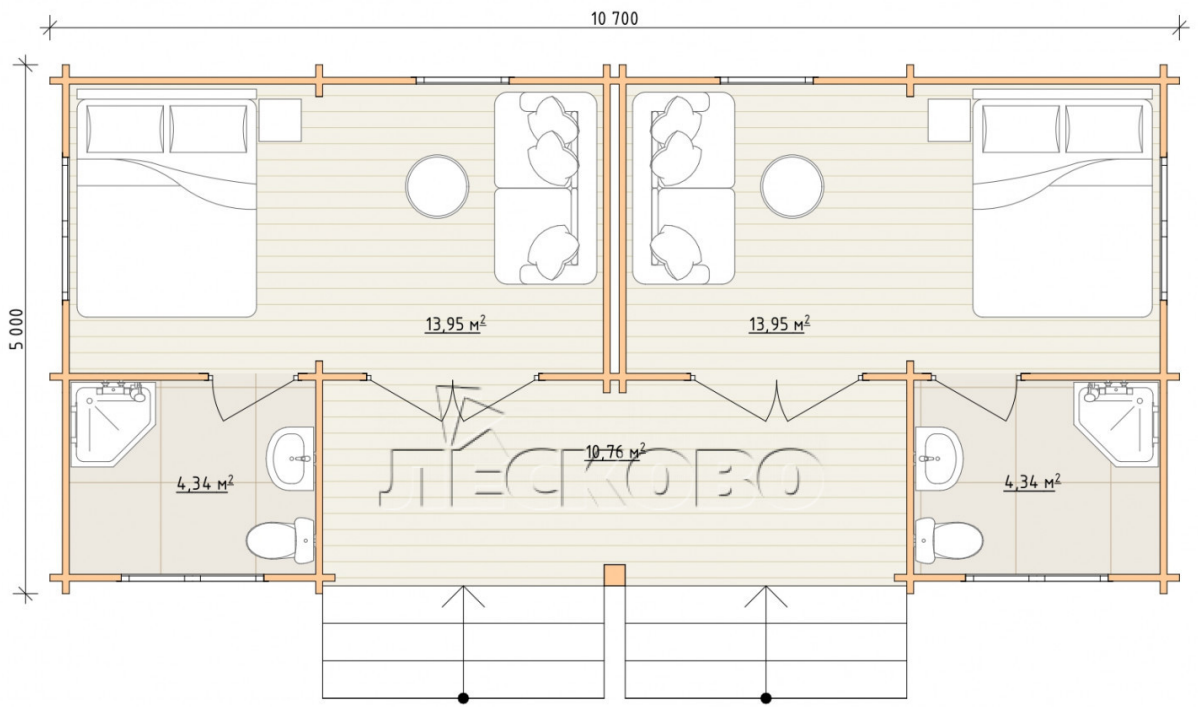



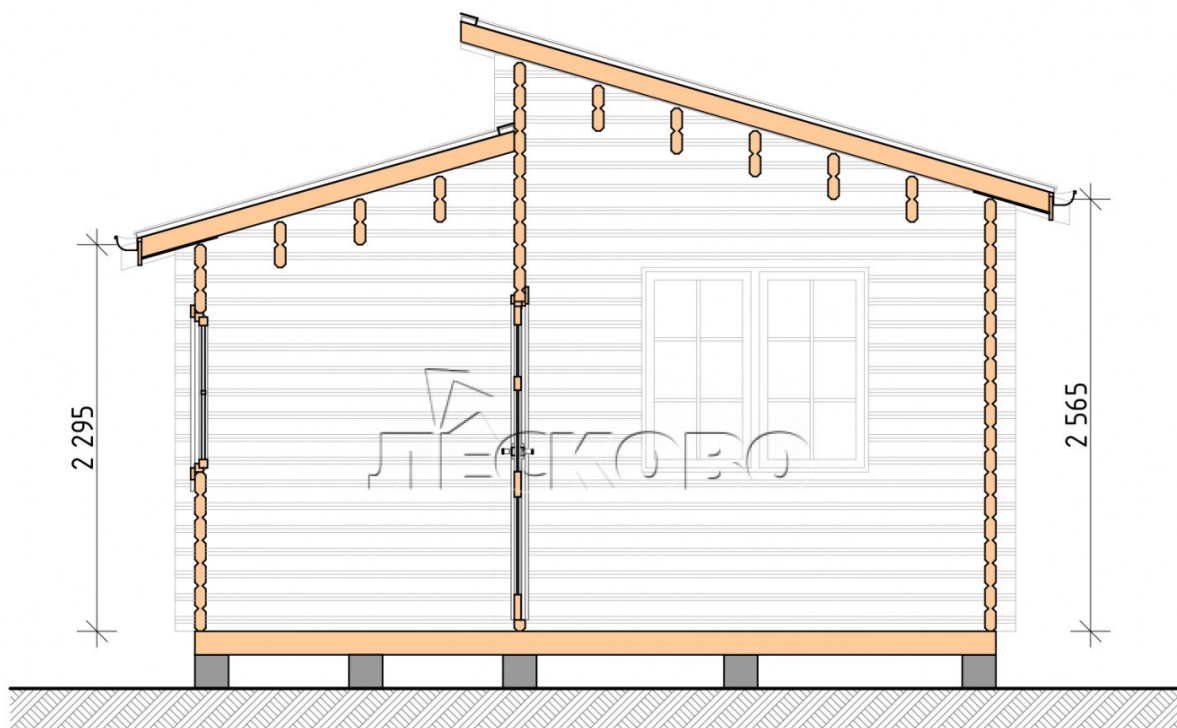

House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;

- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



Window 0.87×1.17 м.2 шт. Window 1.34×1.17 м.2 шт. 1.34×0.91 м.2 шт.

- Wooden doors;




2 шт.

1.62×1.885 м.2 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

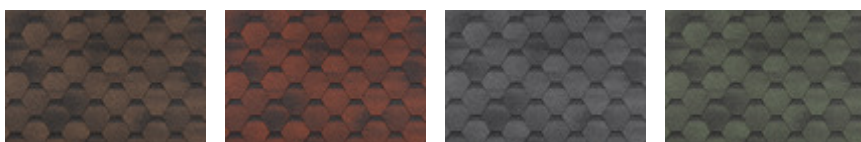

9. Skirting board 35 mm.

+7 (4942) 499-770

156014, г. Кострома, ул. Базовая, д. 8